

Body

MOC of Frame	MS Powder coated/ SS 304/316/316 L
MOC of Drive Pulley	MS Powder coated/ SS 304/316/316 L
MOC of Driven Pulley	Aluminium with Ceramic/ Teflon Fingers
MOC of Guide & Pinch Roller	PP/PVC
MOC of Wiper	Teflon(PTFE)

Source

Drive	3 Phase, AC Motor
Drive Power	½ HP / 1 HP


Oil Transfer Tube

MOC of Tube	Oleophilic Polymer
Size of Tube	18 mm dia x 2 mtr length (upto 25 mm) (upto 15 mtr)
Temperature of Operation	Ambient to 60 °C
Oil Removal Rate	Upto 200 LPH

Stationary Type Model 1



Stationary Type Model 2

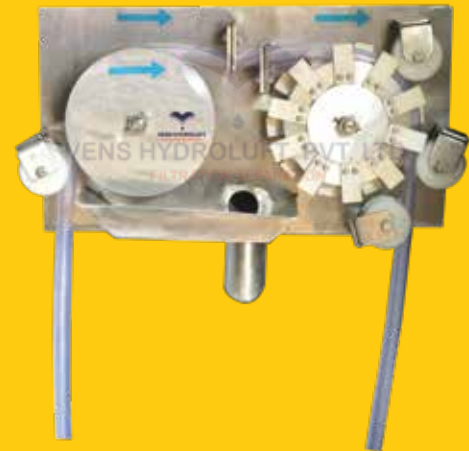

Cantilever Type Model 3

